

CO Transmitter: CS-CO-01

CaterSense® - The CO transmitter is used in conjunction with the CaterSense and VariSense ranges and for the control of natural ventilation applications to control the CO levels within a given space.


The transmitter has 1 x 0~10v analogue output which are linear in respect of the range of detection and 1 x alarm relay output rated to 1A.



Model Type	Model	Description
	CS-CO-01	CO transmitter
Technical Data	Power supply	24Vac / dc
	Dimensions	120 mm x 86 mm x 53 mm (Wt: 180g)
Wiring Terminals	V+	+24Vac / dc
	0V	0 volt ac / dc
Range: 0~100ppm	V	0~10vdc (CO output)
Set point 30ppm	COM & NC	Alarm relay output

INSTALLATION

The unit should be positioned at high/mid/low level depending on the density of the gas being detected.

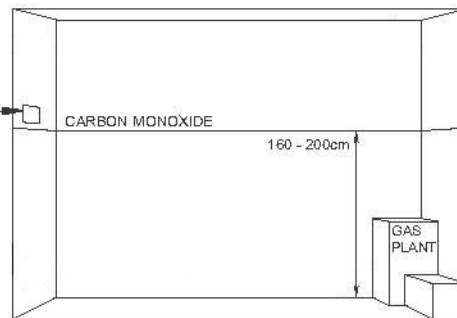

Mounting

Install in a clean environment in an area with good air movement.

Recommended mounting height 1.6 - 2m from floor.

Avoid areas of localised heat, windows, doors etc.



This symbol on this product or the package indicates that disposal of this product after its lifecycle could harm the environment.
DO NOT dispose of this product (or batteries if used) as unsorted municipal waste. It should be disposed by a specialised company for recycling.
This product should be returned to your distributor or to a local recycling service.
Respect the local environment rules.